

RF EP-RGB-20-RC

RF LED RGB Controller EP-RGB-20-RC REMOTE CONTROL

This wireless RF remote controller allows you to connect to our RGB LED strip to display fancy illumination at you home, hotel, display showcase, dance room, customize signage and etc.

It comes with a main controller for you to connect to any common anode RGB LED strip and a RF remote with a 12V battery included.

The controller can provide up to a maximium of 4A per channel. It also provide a plug-in terminal block for easy installation. \oplus \oplus \oplus \oplus \oplus

SPECIFICATIONS

- Working temperature: -20~60
- Supply voltage: DC 12-24V is default, 5V is optional
- Output: 3 channels
- Transmission/receiving frequency: 433MHz
- Remote distance: 10 15M
- Controller dimension: L128 * W64 * H24 mm
- Remote dimension: L85*W52*H7 MM
- Packing size: L145 * W95 * H50mm
- Net weight: 165g
- Gross weight: 205g
- Static power consumption: $<1~\mathrm{W}$
- Output current: <4A (each channel)
- Output power: 5V: <60W, 12V: <144W, 24V: <288W



 $\Theta \Theta \Theta \Theta$


 $\Theta \Theta \Theta C$

 $\Theta \Theta \Theta \Theta$

000000000

 \ominus^{Θ}



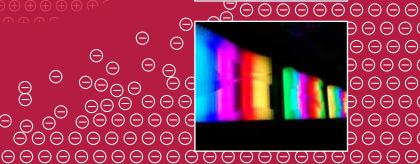



BEYOND THE LIMITS!